

# 92

## AGB series

### 92X92X38mm

#### ●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)  
Impeller : plastic(94V-0)
- Bearing / Ball bearing
- Weight / 200g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)  
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承
- 重量 / 200克




#### ●Specification / 詳細規格 \* 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油承軸/sleeve bearing

Model	Bearing	Voltage	Operating Vol.	Current	Speed	Max. Air Flow		Max. Static Pressure		Sound	Weight
機型	軸承	電壓	操作電壓	電流	轉速	最大風量		最大風壓		噪音	重量
P/N	B/S/F	V	V	A	RPM	m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	In-H <sub>2</sub> O	dBA	g
AGB09238*12L	B	12	6.0~13.2	0.64	4300	2.51	88.47	12.95	0.51	46.48	200
AGB09238*12M	B	12	6.0~13.2	0.76	5000	3.01	106.18	18.90	0.74	50.59	200
AGB09238*12H	B	12	6.0~13.2	1.35	6000	3.62	127.93	27.16	1.07	55.39	200
AGB09238*12U	B	12	6.0~13.2	2.71	7000	4.23	149.39	35.96	1.42	58.09	200
AGB09238*12V	B	12	6.0~13.2	2.95	8000	4.90	173.16	47.10	1.85	61.35	200
AGB09238*24L	B	24	12.0~26.4	0.30	4300	2.51	88.47	12.95	0.51	46.48	200
AGB09238*24M	B	24	12.0~26.4	0.47	5000	3.01	106.18	18.90	0.74	50.59	200
AGB09238*24H	B	24	12.0~26.4	0.75	6000	3.62	127.93	27.16	1.07	55.39	200
AGB09238*24U	B	24	12.0~26.4	1.02	7000	4.23	149.39	35.96	1.42	58.09	200
AGB09238*24V	B	24	12.0~26.4	1.18	8000	4.90	173.16	47.10	1.85	61.35	200
AGB09238*48L	B	48	24.0~52.8	0.17	4300	2.51	88.47	12.95	0.51	46.48	200
AGB09238*48M	B	48	24.0~52.8	0.24	5000	3.01	106.18	18.90	0.74	50.59	200
AGB09238*48H	B	48	24.0~52.8	0.41	6000	3.62	127.93	27.16	1.07	55.39	200
AGB09238*48U	B	48	24.0~52.8	0.48	7000	4.23	149.39	35.96	1.42	58.09	200
AGB09238*48V	B	48	24.0~52.8	0.68	8000	4.90	173.16	47.10	1.85	61.35	200

#### ● Drawing & panel out-cuts/ 圖面及出入風口

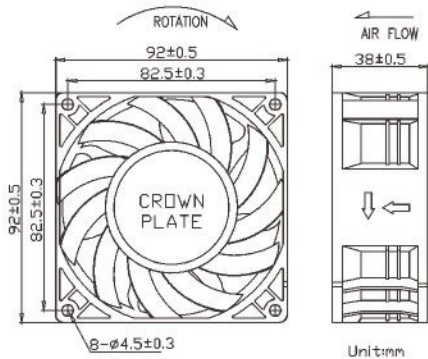

#### ● Characteristic Curves/ 特性曲線

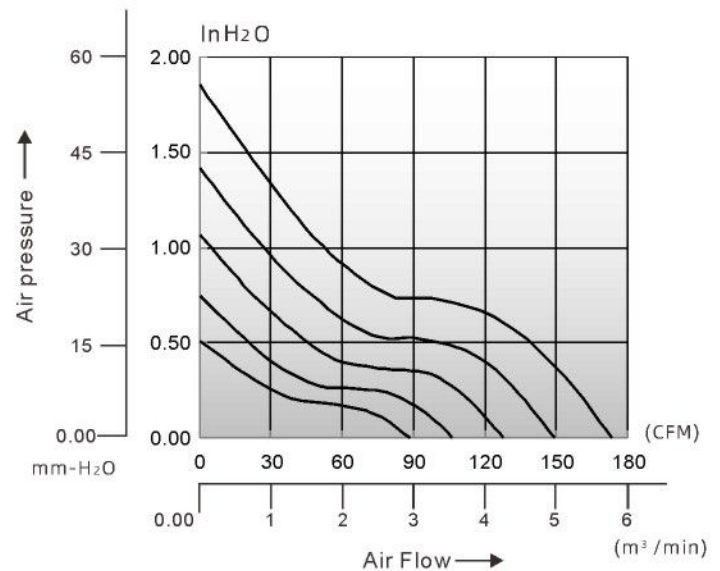

Specification is subject to change for improvement without notice / 基於改良的規格變更，不另行通知